
PF-LRM: POSE-FREE LARGE RECONSTRUCTION MODEL FOR JOINT POSE AND SHAPE PREDICTION

Peng Wang*

Adobe Research & HKU
totoro97@outlook.com

Hao Tan

Adobe Research
hatan@adobe.com

Sai Bi

Adobe Research
sbi@adobe.com

Yinghao Xu*

Adobe Research & Stanford
yhxu@stanford.edu

Fujun Luan

Adobe Research
fluan@adobe.com

Kalyan Sunkavalli

Adobe Research
sunkaval@adobe.com

Wenping Wang

Texas A&M University
wenping@tamu.edu

Zexiang Xu

Adobe Research
zexu@adobe.com

Kai Zhang

Adobe Research
kaiz@adobe.com

ABSTRACT

We propose a **Pose-Free Large Reconstruction Model** (*PF-LRM*) for reconstructing a 3D object from a few *unposed* images even with little visual overlap, while simultaneously estimating the relative camera poses in ~ 1.3 seconds on a single A100 GPU. *PF-LRM* is a highly scalable method utilizing the self-attention blocks to exchange information between 3D object tokens and 2D image tokens; we predict a coarse point cloud for each view, and then use a differentiable Perspective-n-Point (PnP) solver to obtain camera poses. When trained on a huge amount of multi-view posed data of $\sim 1M$ objects, *PF-LRM* shows strong cross-dataset generalization ability, and outperforms baseline methods by a large margin in terms of pose prediction accuracy and 3D reconstruction quality on various unseen evaluation datasets. We also demonstrate our model’s applicability in downstream text/image-to-3D task with fast feed-forward inference. Our project website is at: <https://totoro97.github.io/pf-lrm>.

1 INTRODUCTION

3D reconstruction is a classical computer vision problem, with applications spanning imaging, perception, and computer graphics. While both traditional photogrammetry (Barnes et al., 2009; Schönberger et al., 2016; Furukawa & Ponce, 2009) and modern neural reconstruction methods (Mildenhall et al., 2020; Wang et al., 2021; Yariv et al., 2021) have made significant progress in high-fidelity geometry and appearance reconstruction, they rely on having images with calibrated camera poses as input. These poses are typically computed using a Structure-from-Motion (SfM) solver (Schonberger & Frahm, 2016; Snavely et al., 2006).

SfM assumes dense viewpoints of the scene where input images have sufficient overlap and matching image features. This is not applicable in many cases, e.g., e-commerce applications, consumer capture scenarios, and dynamic scene reconstruction problems, where adding more views incurs a higher cost and thus the captured views tend to be *sparse* and have a *wide baseline* (i.e., share little overlap). In such circumstances, SfM solvers become unreliable and tend to fail. As a result, (neural) reconstruction methods, including sparse methods (Niemeyer et al., 2022; Deng et al., 2022; Long et al., 2022; Zhou & Tulsiani, 2023; Wang et al., 2023) that require accurate camera poses, cannot be reliably used for such applications.

In this work, we present *PF-LRM*, a category-agnostic method for jointly predicting both camera poses and object shape and appearance (represented using a triplane NeRF (Chan et al., 2022; Peng

*This work is done while the author is an intern at Adobe Research.



Figure 1: (Top block) To demonstrate our model’s generalizability to unseen in-the-wild images, we take 2-4 unposed images from prior/concurrent 3D-aware generation work, and use our *PF-LRM* to jointly reconstruct the NeRF and estimate relative poses in a feed-forward manner. (Bottom block) we also show our model’s generalizability on real captures. Sources of generated/synthetic images: Column 1 (top-to-bottom), Magic3D (Lin et al., 2023b), DreamFusion (Poole et al., 2022), Wonder3D (Long et al., 2023); Column 2 (top-to-bottom), Zero-1-to-3 (Liu et al., 2023a), SyncDreamer (Liu et al., 2023b), Consistent-1-to-3 (Ye et al., 2023); Column 3 (top-to-bottom), MV-Dream (Shi et al., 2023b), NeRF (Mildenhall et al., 2020), Zero123++ (Shi et al., 2023a). Source of real images: Row 1 column 1, HuMMan Dataset (Cai et al., 2022); Row 1 column 2, RelPose++ (Lin et al., 2023a); Others, our phone captures.

et al., 2020)). As shown in Fig. 1, our approach can robustly reconstruct accurate poses and realistic 3D objects using as few as 2–4 sparse input images from diverse input sources. The core of our approach is a novel scalable single-stream transformer model (see Fig. 3) that computes self-attention over the union of the two token sets: the set of 2D multi-view image tokens and the set of 3D triplane NeRF tokens, allowing for comprehensive information exchange across all 2D and 3D tokens. We use the final NeRF tokens, contextualized by 2D images, to represent a triplane NeRF and supervise it by a novel view rendering loss. On the other hand, we use the final image patch tokens contextualized by NeRF tokens for predicting the coarse point clouds used to solve per-view camera poses.

Unlike previous methods that regress pose parameters from images directly, we estimate the 3D object points corresponding to 2D patch centers from their individual patch tokens (contextualized by NeRF tokens). These points are supervised by the NeRF geometry in an online manner during training and enable accurate pose estimation using a differentiable Perspective-n-Point (PnP) solver (Chen et al., 2022b). In essence, we transform the task from per-view pose prediction into per-patch 3D surface point prediction, which is more suitable for our single-stream transformer that’s designed for token-wise operations, leading to more accurate results than direct pose regression.

PF-LRM is a large transformer model with ~ 590 million parameters trained on large-scale multi-view posed renderings from Objaverse (Deitke et al., 2023) and real-world captures from MVImgNet (Yu et al., 2023) that cover ~ 1 million objects in total, without direct 3D supervision. Despite being trained under the setting of 4 input views, it generalizes well to unseen datasets and can handle a variable number of 2–4 unposed input images during test time (see Fig. 1), achieving state-of-the-art results for both pose estimation and novel view synthesis in the case of very sparse inputs, outperforming baseline methods (Jiang et al., 2022; Lin et al., 2023a) by a large margin. We also showcase some potential downstream applications of our model, e.g., text/image-to-3D, in Fig. 1.

2 RELATED WORK

NeRF from sparse posed images. The original NeRF technique (Mildenhall et al., 2020) required hundreds of posed images for accurate reconstruction. Recent research on sparse-view NeRF reconstruction has proposed either regularization strategies (Wang et al., 2023; Niemeyer et al., 2022; Yang et al., 2023; Kim et al., 2022) or learning priors from extensive datasets (Yu et al., 2021; Chen et al., 2021; Long et al., 2022; Ren et al., 2023; Zhou & Tulsiani, 2023; Irshad et al., 2023; Li et al., 2023; Xu et al., 2023). These approaches still assume precise camera poses for every input image; however determining camera poses given such sparse-view images is non-trivial and off-the-shelf camera estimation pipelines (Schonberger & Frahm, 2016; Snavely et al., 2006) tend to fail. In contrast, our method efficiently reconstructs a triplane NeRF (Chan et al., 2022; Chen et al., 2022a; Peng et al., 2020) from sparse views without any camera pose inputs; moreover, our method is capable of recovering the unknown relative camera poses during inference time.

Structure from Motion. Structure-from-Motion (SfM) techniques (Schonberger & Frahm, 2016; Snavely et al., 2006; Mohr et al., 1995) find 2D feature matches across views, and then solve for camera poses and sparse 3D scene structure from these 2D correspondences at the same time. These methods work pretty well in the presence of sufficient visual overlap between nearby views and adequate discriminative features, leading to accurate camera estimation. However, when the input views are extremely sparse, for instance, when there are only 4 images looking from the front-, left-, right-, back- side of an object, it becomes very challenging to match features across views due to the lack of sufficient overlap, even with modern learning-based feature extractors (DeTone et al., 2018; Dusmanu et al., 2019; Revaud et al., 2019) and matchers (Sarlin et al., 2020; 2019; Liu et al., 2021). In contrast, our method relies on the powerful learnt shape prior from a large amount of data to successfully register the cameras in these challenging scenarios.

Neural pose prediction from RGB images. A series of methods (Lin et al., 2023a; Rockwell et al., 2022; Cai et al., 2021) have sought to address this issue by directly regressing camera poses through network predictions. Notably, these methods do not incorporate 3D shape information during the camera pose prediction process. We demonstrate that jointly reasoning about camera pose and 3D shape leads to significant improvement over these previous methods that only regress the camera pose. SparsePose (Sinha et al., 2023), FORGE (Jiang et al., 2022) and FvOR (Yang

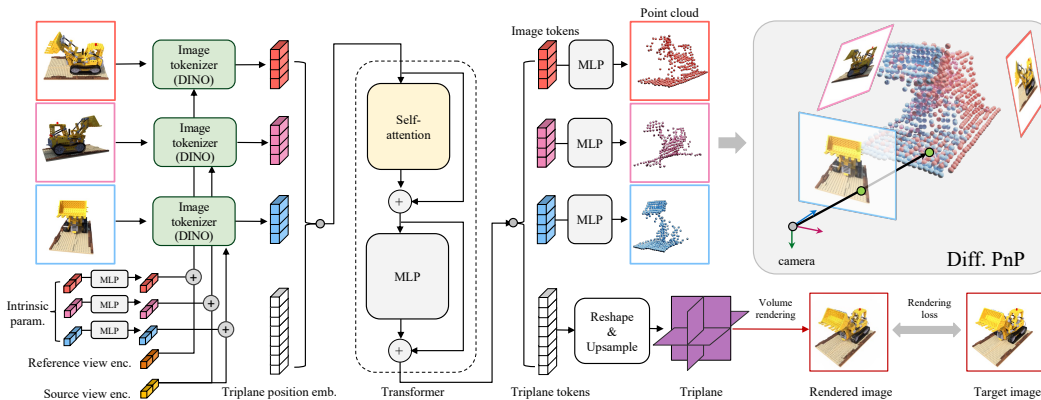


Figure 2: **Overview of our pipeline.** Given unposed sparse input images, we use a large transformer model to reconstruct a triplane NeRF while simultaneously estimating the relative camera poses of all source views with respect to the reference one. During training, the triplane tokens are supervised with a rendering loss at novel viewpoints using ground-truth camera poses. For camera registration, instead of directly regressing the camera poses, we map the image tokens to a coarse 3D geometry in the form of a point cloud (top right), where we predict a 3D point from each patch token corresponding to the patch center. We then use a differentiable PnP solver to obtain the camera poses from these predicted 3D-2D correspondences (Sec. 3.3).

et al., 2022) implement a two-stage prediction pipeline, initially inferring coarse camera poses and coarse shapes by neural networks and then refining these pose predictions (through further network evaluations (Sinha et al., 2023) or per-object optimizations (Jiang et al., 2022; Yang et al., 2022)) jointly with 3D structures. Our method employs a single-stage inference pipeline to recover both camera poses and 3D NeRF reconstructions at the same time. To predict camera poses, we opt not to regress them directly as in prior work. Instead, we predict a coarse point cloud in the scene coordinate frame (Shotton et al., 2013) for each view from their image patch tokens; these points, along with image patch centers, establish a set of 3D-2D correspondences, and allow us to solve for poses using a differentiable PnP solver (Chen et al., 2022b; Brachmann et al., 2017). This is in contrast to solving poses from frame-to-frame scene flows (3D-3D correspondences) used by FlowCam (Smith et al., 2023), and better suits the sparse view inputs with little overlap. Moreover, our backbone model is a simple transformer-based model that is highly scalable; hence it can be trained on massive multi-view posed data of diverse and general objects to gain superior robustness and generalization. This distinguishes us from the virtual correspondence work (Ma et al., 2022) that’s designed specifically for human images.

3 METHOD

Given a set of N images $\{\mathbf{I}_i | i = 1, \dots, N\}$ with unknown camera poses capturing a 3D object, our goal is to reconstruct the object’s 3D model and estimate the pose of each image. In particular, we designate one input image (i.e., \mathbf{I}_1) as a *reference* view, and predict a 3D triplane NeRF and camera poses of other images relative to the reference view. This is expressed by

$$\mathbf{T}, y_2, \dots, y_N = \text{PF-LRM}(\mathbf{I}_1, \dots, \mathbf{I}_N), \quad (1)$$

where \mathbf{T} is the triplane NeRF defined in the coordinate frame of the reference view 1 and y_2, \dots, y_N are the predicted camera poses of view 2, \dots , N relative to view 1.

We achieve this using a transformer model as illustrated in Fig. 3. Specifically, we tokenize both input images and a triplane NeRF, and apply a single-stream multimodal transformer (Chen et al., 2020; Li et al., 2019) to process the concatenation of NeRF tokens and image patch tokens with self-attention layers (Sec. 3.1). The output NeRF tokens represent a triplane NeRF for neural rendering, modeling object’s geometry and appearance (Sec. 3.2), and the output image patch tokens are used to estimate per-view coarse point cloud for pose estimation with a differentiable PnP solver (Sec. 3.3).

3.1 SINGLE-STREAM TRANSFORMER

Image tokenization, view encoding, intrinsics conditioning. We use the pretrained DINO (Caron et al., 2021) Vision Transformer (Dosovitskiy et al., 2020) to tokenize our input images. We specifically take DINO-ViT-B/16 with a patch size of 16×16 and a 12-layer transformer of width $D = 768$. Each input image of resolution $H \times W$ is tokenized into $M = H/16 \times W/16$ tokens.

To distinguish reference image tokens from source image tokens, we use two additional learnable 768-dimensional features, \mathbf{v}_r and \mathbf{v}_s , as view encoding vectors – one \mathbf{v}_r for the reference view ($i = 1$) and another \mathbf{v}_s for all other source views ($i = 2, \dots, N$). These view encoding vectors allow our model to perform shape reconstruction and pose estimation relative to the reference view. In addition, to make our model aware of input cameras’ intrinsics, we use a shared MLP to map each view’s intrinsics $[f_x, f_y, c_x, c_y]$ to a intrinsics conditioning vector $\mathbf{i} \in \mathbf{R}^{768}$; hence we have $\mathbf{i}_r, \mathbf{i}_i, i = 2, \dots, N$ for reference and source views, respectively. We then pass the addition of each view’s view encoding and intrinsics conditioning vectors to the newly-added adaptive layer norm block inside each transformer block (self-attention + MLP), following prior work (Hong et al., 2023; Peebles & Xie, 2022; Huang & Belongie, 2017).

Triplane tokenization and position embedding. We tokenize a triplane \mathbf{T} of shape $3 \times H_T \times W_T \times D_T$ into $3 \times H_T \times W_T$ tokens, where H_T, W_T, D_T denote triplane height, width and channel, respectively. We additionally learn a triplane position embedding \mathbf{T}_{pos} consisting of $3 \times H_T \times W_T$ position markers for triplane tokens; they are mapped to the target triplane tokens by a transformer model sourcing information from input image tokens.

Single-stream transformer. The full process of this single-stream transformer can be written as

$$\mathbf{T}, \{\mathbf{a}_{i,j} | i = 1, \dots, N; j = 1, \dots, M\} = \text{PF-LRM}(\mathbf{T}_{pos}, \mathbf{I}_1, \dots, \mathbf{I}_N, \mathbf{v}_r, \mathbf{v}_s). \quad (2)$$

Here $\mathbf{a}_{i,j}$ represents the token of the j^{th} patch at view i , and PF-LRM is a sequence of transformer layers. Each transformer layer is composed of a self-attention layer and a multi-layer perceptron layer (MLP), where both use residual connections. We simply concatenate the image tokens and the triplane tokens as Transformer’s input as shown in Fig. 3. The output triplane tokens \mathbf{T} and image tokens $\mathbf{a}_{i,j}$ are used for volumetric NeRF rendering and per-view pose prediction, which we will discuss later. Our model design is inspired by LRM (Hong et al., 2023) and its follow-ups (Li et al., 2023; Xu et al., 2023), but are different and has its own unique philosophy in that we adopt a single-stream architecture where information exchange is mutual between image tokens and NeRF tokens due to that we predict both a coherent NeRF and per-view coarse geometry used for camera estimation (detailed later in Sec. 3.3), while prior work adopts an encoder-decoder design where NeRF tokens source unidirectional information from image tokens using cross-attention layers.

3.2 NERF SUPERVISION VIA DIFFERENTIABLE VOLUME RENDERING

To supervise the learning of shape and appearance, we use neural differentiable volume rendering to render images at novel viewpoints from the triplane NeRF, as done in (Mildenhall et al., 2020; Chan et al., 2022). This process is expressed by

$$C = \sum_{k=1}^K \tau_{k-1} (1 - \exp(-\sigma_k \delta_k)) c_k, \quad \tau_k = \exp(-\sum_{k'=1}^k \sigma_{k'} \delta_{k'}), \quad \sigma_k, c_k = \text{MLP}_{\mathbf{T}}(\mathbf{T}(\mathbf{x}_k)). \quad (3)$$

Here, C is the rendered RGB pixel color, σ_k and c_k are volume density and color decoded from the triplane NeRF \mathbf{T} at the 3D location \mathbf{x}_k on the marching ray through the pixel, and τ_k (τ_0 is defined to be 1) and δ_k are the volume transmittance and step size; $\mathbf{T}(\mathbf{x}_k)$ represents the features that are bilinearly sampled and concatenated from the triplane at \mathbf{x}_k , and we apply an MLP network $\text{MLP}_{\mathbf{T}}$ to decode the density and color used in volume rendering.

We supervise our NeRF reconstruction with L2 and VGG-based LPIPS (Zhang et al., 2018) rendering loss:

$$L_C = \gamma'_C \|C - C_{gt}\|^2 + \gamma''_C L_{\text{lpips}}(C, C_{gt}), \quad (4)$$

where C_{gt} is the ground-truth pixel color, and γ'_C, γ''_C are loss weights. In practice, we render crops of size $h \times w$ for each view to compute the rendering loss L_C , and divide the L2 loss with $h \times w$.

3.3 POSE PREDICTION VIA DIFFERENTIABLE PNP SOLVER

We estimate relative camera poses from the per-view image patch tokens contextualized by the NeRF tokens. Note that a straightforward solution is to directly regress camera pose parameters from the image tokens using an MLP decoder and supervise the poses with the ground truth; however, such a naïve solution lacks 3D inductive biases and, in our experiments (See Tab. 10), often leads to limited pose estimation accuracy. Therefore, we propose to predict per-view coarse geometry (in the form of a sparse point cloud, i.e., predicting one 3D point for each patch token) that is supervised to be consistent with the NeRF geometry, allowing us to obtain the camera poses with a PnP solver given the 3D-2D correspondences from the per-patch predicted points and patch centers.

In particular, from each image patch token output by the transformer $\mathbf{a}_{i,j}$, we use an MLP to predict a 3D point and the prediction confidence:

$$\mathbf{p}_{i,j}, \alpha_{i,j}, w_{i,j} = \text{MLP}_{\alpha}(\mathbf{a}_{i,j}), \quad (5)$$

where $\mathbf{p}_{i,j}$ represents the 3D point location on the object seen through the central pixel of the image patch, $\alpha_{i,j}$ is the pixel opacity that indicates if the pixel covers the foreground object, and $w_{i,j}$ is an additional confidence weight used to determine the point’s contribution to the PnP solver.

Note that in training stage, where the ground-truth camera poses are known, the central pixel’s point location and opacity can also be computed from a NeRF as done in previous work (Mildenhall et al., 2020). This allows us to enforce the consistency between the per-patch point estimates and the triplane NeRF geometry with following losses:

$$L_{\mathbf{p}} = \sum_{i,j} \|\mathbf{p}_{i,j} - \bar{\mathbf{x}}_{i,j}\|^2, \quad L_{\alpha} = \sum_{i,j} (\alpha_{i,j} - (1 - \bar{\tau}_{i,j}))^2, \quad (6)$$

where $\bar{\mathbf{x}}$ and $\bar{\tau}$ are computed along the pixel ray (marched from the ground-truth camera poses) using the volume rendering weights in Eqn. 3 by

$$\bar{\mathbf{x}} = \sum_{k=1}^K \tau_{k-1} (1 - \exp(-\sigma_k \delta_k)) \mathbf{x}_k, \quad \bar{\tau} = \tau_K = \exp\left(-\sum_{k'=1}^K \sigma_{k'} \delta_{k'}\right). \quad (7)$$

Here $\bar{\mathbf{x}}$ represents the expected 3D location and $\bar{\tau}$ is the final volume transmittance τ_K . Essentially, we distill the geometry of our learnt NeRF reconstruction to supervise our per-view coarse point cloud prediction in an online manner, as we only use multi-view posed images to train our model without accessing 3D ground-truth. This online distillation is critical to stabilize the differentiable PnP loss mentioned later in Eq. 11, without which we find the training tend to diverge in our experiments.

When $\mathbf{p}_{i,j}$ and $\alpha_{i,j}$ are estimated, we can already compute each pose y_i with a standard weighted PnP solver that solves

$$\arg \min_{y_i=[R_i, t_i]} \frac{1}{2} \sum_{j=1}^M \xi(y_i, \mathbf{p}_{i,j}, \beta_{i,j}), \quad (8)$$

$$\xi(y_i, \mathbf{p}_{i,j}, \alpha_{i,j}) = \beta_{i,j} \|\mathcal{P}(R_i \cdot \mathbf{p}_{i,j} + t_i) - \mathbf{q}_{i,j}\|^2, \quad (9)$$

$$\beta_{i,j} = \alpha_{i,j} w_{i,j}, \quad (10)$$

where $\mathbf{q}_{i,j}$ is the 2D central pixel location of the patch, $[R_i, t_i]$ are the rotation and translation components of the pose y_i , \mathcal{P} is the projection function with camera intrinsics involved, and $\xi(\cdot)$ represents the pixel re-projection error weighted by predicted opacity and PnP confidence. Here, the predicted opacity values are used to weigh the errors to prevent the non-informative white background points from affecting the pose prediction.

However, computing the solution of PnP is a non-convex problem prone to local minimas. Therefore, we further apply a robust differentiable PnP loss, proposed by EPro-PnP (Chen et al., 2022b)¹, to regularize our pose prediction, leading to much more accurate results (See Tab. 10). This loss is expressed by

$$L_{y_i} = \frac{1}{2} \sum_j \xi(y_i^{\text{gt}}, \mathbf{p}_{i,j}, \beta_{i,j}) + \log \int \exp\left(-\frac{1}{2} \sum_j \xi(y_i, \mathbf{p}_{i,j}, \beta_{i,j})\right) dy_i, \quad (11)$$

¹We take the public implementation in <https://github.com/tjiiiv-cprg/EPro-PnP>.

where the first term minimizes the reprojection errors of the predicted points with the ground-truth poses and the second term minimizes the reprojection errors with the predicted pose distribution using Monte Carlo integral; we refer readers to the EPro-PnP paper (Chen et al., 2022b) for details about computing the integral term. This differentiable PnP loss, combined with our point prediction losses (in Eqn. 6), leads to plausible per-patch point location and confidence estimates, allowing for accurate final pose prediction.

3.4 LOSS FUNCTIONS AND IMPLEMENTATION DETAILS

Loss. Combining all losses (Eqn. 4,6,11), our final training objective is

$$L = L_C + \gamma_p L_p + \gamma_\alpha L_\alpha + \gamma_y \sum_{i=2}^M L_{y_i}, \quad (12)$$

where L_C represents the rendering loss and $\gamma_p, \gamma_\alpha, \gamma_y$ are the weights for individual loss terms related to per-view coarse geometry prediction, opacity prediction and differentiable PnP loss.

Implementation details. Our single-stream transformer model consists of 36 self-attention layers. We predict triplane of shape $H_T = W_T = 64, D_T = 32$. In order to decrease the tokens used in transformer, the triplane tokens used in transformer is $3072 = 3 \times 32 \times 32$ and will be upsampled to 64 with de-convolution, similar to LRM (Hong et al., 2023). We set the loss weights γ'_C, γ''_C (Eq. 4), $\gamma_p, \gamma_\alpha, \gamma_y$ (Eq. 12) to 1, 2, 1, 1, 1, respectively. We use AdamW (Loshchilov & Hutter, 2017) ($\beta_1 = 0.9, \beta_2 = 0.95$) optimizer with weight decay 0.05 for model optimization. The initial learning rate is zero, which is linearly warmed up to 4×10^{-4} for the first 3k steps and then decay to zero by cosine scheduling. The batch size per GPU is 8. Training this model for 40 epochs takes 128 Nvidia A100 GPUs for about one week. We use the deferred back-propagation technique (Zhang et al., 2022) to save GPU memory in NeRF rendering. For more implementation details, please refer to Sec. A.3 of the appendix.

4 EXPERIMENTS

4.1 EXPERIMENTAL SETTINGS

Training datasets. Our model only requires multi-view posed images to train. To construct a large-scale multi-view posed dataset, we use a mixture of multi-view posed renderings from Objaverse (Deitke et al., 2023) and posed real captures from MVImgNet (Yu et al., 2023). We render the Objaverse dataset following the same protocol as LRM (Hong et al., 2023) and DMV3D (Xu et al., 2023): each object is normalized to $[-1, 1]^3$ box and rendered at 32 random viewpoints. We also preprocess the MVImgNet captures to crop out objects, remove background², and normalizing object sizes in the same way as LRM and DMV3D. In total, we have multi-view images of ~ 1 million objects in our training set: $\sim 730k$ from Objaverse, $\sim 220k$ from MVImgNet.

Evaluation datasets. To evaluate our model’s cross-dataset generalization capability, we utilize a couple of datasets, including OmniObject3D (Wu et al., 2023), Google Scanned Objects (GSO) (Downs et al., 2022), Amazon Berkeley Objects (ABO) (Collins et al., 2022), Common Objects 3D (CO3D) (Reizenstein et al., 2021), and DTU (Aanaes et al., 2016). For OmniObject3D, GSO, ABO datasets, we randomly choose 500 objects for assessing our model’s performance given sparse images as inputs. We render out 5 images from randomly selected viewpoints for each object; to ensure view sparsity, we make sure viewing angles between any two views are at least 45 degrees. We feed randomly-chosen 4 images to our model to predict a NeRF and poses, while using the remaining 1 to measure our novel-view rendering quality. For CO3D dataset, we use the 400 held-out captures provided by RelPose++ (Lin et al., 2023a), which covers 10 object categories. To remove background, we use the masks included in the CO3D dataset. However, we note that these masks can be very noisy sometimes, negatively affecting our model’s performance and the baseline RelPose++ (mask variant). We randomly select 4 random input views for each capture. For DTU dataset, we take the 15 objects with manually annotated masks provided by IDR (Yariv et al., 2020); for each object, we randomly select 8 different combinations of four input views, resulting in a total of 120 different testing inputs.

²Mask removal tool: <https://github.com/danielgatis/rembg>

Baselines. As our *PF-LRM* can do joint pose and shape estimation, we evaluate its performance against baselines on both tasks. For the pose estimation task, we compare *PF-LRM* with FORGE (Jiang et al., 2022), RelPose++ (Lin et al., 2023a), and the SfM-based method HLoc (Sarlin et al., 2019; Schonberger & Frahm, 2016). We also compare with FORGE in terms of the reconstruction quality. We did not compare with SparsePose (Sinha et al., 2023) as there is no public source code available. SRT (Sajjadi et al., 2022) is geometry-free and does not directly predict shapes like us; hence we did not compare with it due to this clear distinction in problem scopes.

Metrics. Since we only care about relative pose estimation in the pose estimation task, we use pair-wise relative pose errors as our metric: for each image pair in the input image set, we measure the rotation part of the relative pose by computing the error as the minimal rotation angle between the prediction and ground-truth. We also report the percentage of image pairs with relative rotation errors below thresholds 15° and 30° . The translation part of the predicted relative pose is measured by its absolute difference from the ground-truth one. We evaluate the reconstruction quality by comparing renderings of our reconstructed NeRF using both *predicted* input-view poses and *ground-truth* novel-view poses against the ground-truth. We report the PSNR, SSIM and LPIPS (Zhang et al., 2018) metrics for measuring the image quality. We use 4 images as inputs for each object when comparing the performance of different methods.

4.2 EXPERIMENT RESULTS

4.2.1 POSE PREDICTION QUALITY

As shown in Tab. 1, our model achieves state-of-the-art results in pose estimation accuracy and rendering quality given highly sparse input images on unseen datasets including OmniObjects3D, ABO, GSO, CO3D, and DTU, consistently outperforming baselines by a large margin across all datasets and all metrics. This is an especially challenging evaluation setting, as we are assessing the cross-dataset generalization capability of different methods, which reflects their performance when deployed in real-world applications. In this regard, we directly use the pretrained checkpoints from baselines, including FORGE (Jiang et al., 2022), HLoc (Sarlin et al., 2019) and RelPose++ (Lin et al., 2023a), for comparisons.

On OmniObject3D, GSO, ABO datasets where the input images are explicitly sparsified (see Sec. 4.1), we achieve an average of 14.6x reduction in rotation error for the predicted poses compared with FORGE, while the average rotation error reductions are 15.3x compared with HLoc and 14.7x compared with RelPose++. As FORGE expects input images to have black background, we replace the white background in our rendered images with a black one using the rendered alpha mask before feeding them into FORGE. RelPose++, however, has two variants: one trained on images with background (*w/ bg*) and the other trained on images without background (*w/o bg*). We evaluate the *w/o bg* variant on these datasets featuring non-informative white background. In addition, we observe that HLoc has a very high failure rate (more than 97%) on these very sparse inputs, due to that matching features is too hard in this case; this also highlights the difficulty of pose prediction under extremely sparse views, and the contributions this work to the area.

On the held-out CO3D test set provided by RelPose++, our rotation error is 5x smaller than FORGE, 3.6x smaller than HLoc, and 1.8x smaller than RelPose++ (*w/ bg*). Note that FORGE, HLoc and our method are all tested on input images with background removed. The inaccurate foreground masks provided by CO3D can negatively influence these methods’ performance; this can explain our performance degradation from datasets like OmniObject3D to datasets like CO3D. It will be interesting to explore ways to extend our method to handle background directly in future work. We also note that CO3D captures may not cover the objects in 360, hence we do not sparsify the input poses but instead use randomly selected views; evaluation on this dataset may not reflect different models’ performance on highly sparse inputs. In addition, RelPose++ is trained on the CO3D training set while the other methods, including ours, are not. On DTU dataset where none of the methods are trained on, we achieve 4x rotation error reduction than RelPose++ (*w/ bg*), and 7.6x reduction than FORGE, showing much better generalization capability than these methods. Interestingly, as we do not sparsify input views intentionally on this data for the same reason as CO3D, HLoc, which relies on traditional SfM (Schonberger & Frahm, 2016) to solve poses, can produce reasonably accurate pose estimations if enough features are correctly matched (failure rate

Table 1: On pose prediction task, we compare cross-dataset generalization to OmniObject3D (Wu et al., 2023), GSO (Downs et al., 2022), ABO (Collins et al., 2022), CO3D (Reizenstein et al., 2021), DTU (Aanæs et al., 2016) with baselines FORGE (Jiang et al., 2022), HLoc (Sarlin et al., 2019), RelPose++ (Lin et al., 2023a). Note that RelPose++ is trained on CO3D training set; hence its numbers on CO3D test set are not exactly cross-dataset performance. On OmniObject3D, GSO, ABO where background is white in the rendered data, we evaluate the *w/o bg* variant of RelPose++, while on CO3D and DTU where real captures contain background, we evaluate its *w/ bg* variant.

OmniObject3D				
Method	R. error ↓	Acc.@15° ↑	Acc.@30° ↑	T. error ↓
FORGE	71.06	0.071	0.232	0.726
HLoc (F. rate 99.6%)	98.65	0.083	0.083	1.343
RelPose++ (w/o bg)	69.22	0.070	0.273	0.712
Ours	6.32	0.962	0.990	0.067
GSO				
Method	R. error ↓	Acc.@15° ↑	Acc.@30° ↑	T. error ↓
FORGE	103.81	0.012	0.056	1.100
HLoc (F. rate 97.2%)	97.12	0.036	0.131	1.199
RelPose++ (w/o bg)	107.49	0.037	0.098	1.143
Ours	3.99	0.956	0.976	0.041
ABO				
Method	R. error ↓	Acc.@15° ↑	Acc.@30° ↑	T. error ↓
FORGE	105.23	0.014	0.059	1.107
HLoc (F. rate 98.8%)	94.84	0.067	0.178	1.302
RelPose++ (w/o bg)	102.30	0.060	0.144	1.103
Ours	16.27	0.865	0.885	0.150
CO3D				
Method	R. error ↓	Acc.@15° ↑	Acc.@30° ↑	T. error ↓
FORGE	77.74	0.139	0.278	1.181
HLoc (F. rate 89.0%)	55.87	0.288	0.447	1.109
RelPose++ (w/ bg)	28.24	0.748	0.840	0.448
Ours	15.53	0.850	0.899	0.242
DTU				
Method	R. error ↓	Acc.@15° ↑	Acc.@30° ↑	T. error ↓
FORGE	78.88	0.046	0.188	1.397
HLoc (F. rate 47.5%)	11.84	0.725	0.915	0.520
RelPose++ (w/ bg)	41.84	0.369	0.657	0.754
Ours	10.42	0.900	0.951	0.187

is 47.5%); however, it’s performance is still far worse than ours, especially on the metric $Acc.@15^\circ$ that measures the percentage of pair-wise rotation errors below the threshold of 15 degrees.

We attribute our model’s success to the prediction of both camera poses and object shapes at the same time, where the synergy of the two tasks are exploited by the self-attention mechanism. The generic shape prior learned on the large Objaverse and MVImgNet datasets differentiate our method from other methods, as we find it particularly helpful in estimating camera parameters given sparse inputs (See Sec. 4.4). Prior methods like RelPose++ failed to utilize this synergy, as they solve for poses directly from images without simultaneously reconstructing the 3D object. FORGE designed a learning framework to introduce shape prior into the pose estimation process, but its training process is composed of six stages, which seems fragile and not easy to scale up, compared with our single-stream transformer design. Therefore it shows much weaker cross-dataset generalization capability than our method. This said, we also acknowledge that if one can successfully scale up the training of the baseline RelPose++ and FORGE on large-scale datasets, their performance can also be improved compared with their pretrained model using limited data. We show one such experiment where we re-train RelPose++ on Objaverse data in appendix A.6; however, our model, trained on exactly the same Objaverse data, still outperforms this re-trained baseline by a wide margin in terms of pose prediction accuracy on various evaluation datasets, demonstrating the superiority of our method. We leave the investigation of scaling up FORGE to future work due to its complex pipeline.

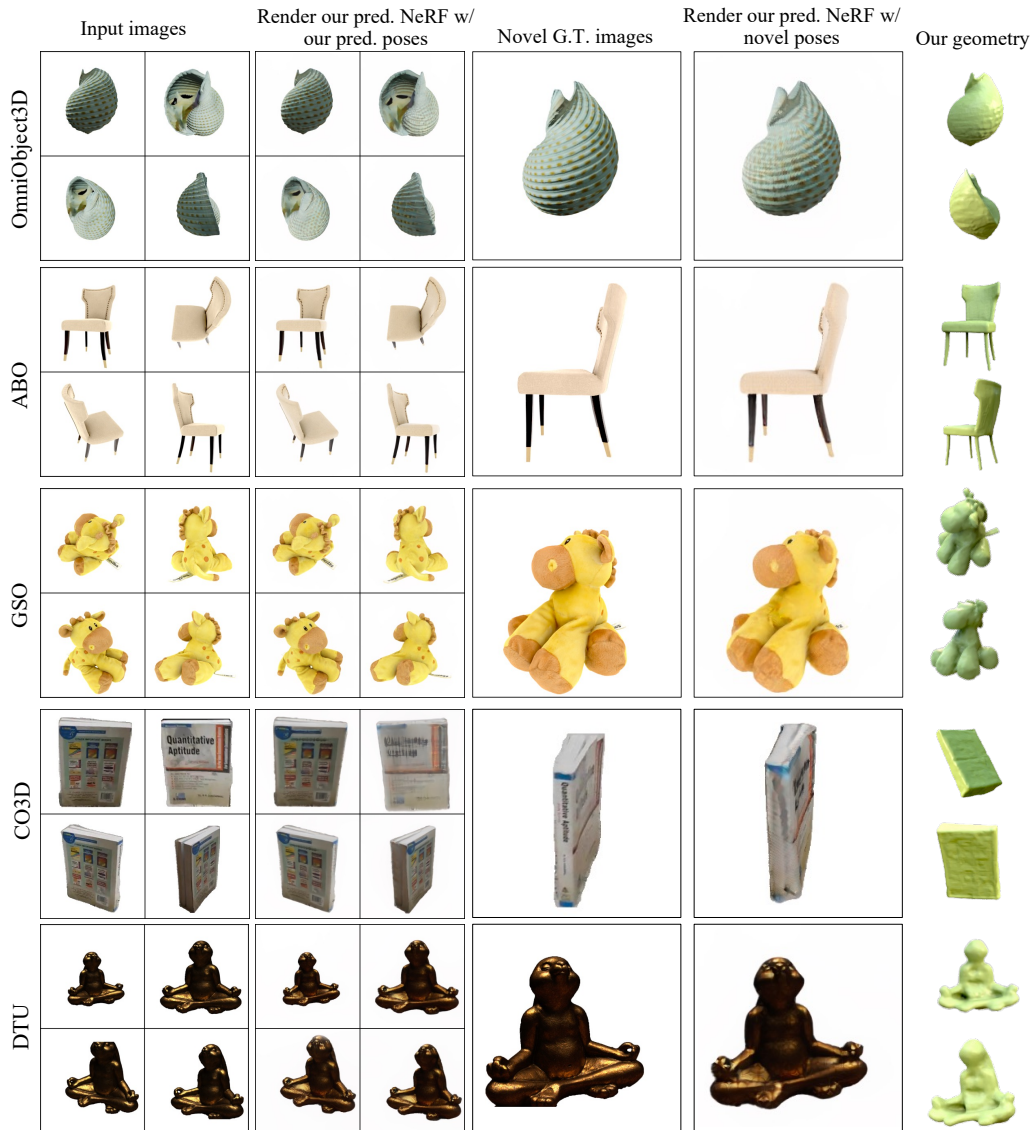


Figure 3: Cross-dataset generalization to unseen OmniObject3D (Wu et al., 2023), GSO (Downs et al., 2022) and ABO (Collins et al., 2022) datasets. Renderings of our *predicted* NeRF at *predicted* poses (second column) closely match the input unposed images (first column), demonstrating the excellent accuracy of both predictions; we also show novel-view rendering of our reconstructed NeRF (fourth column) and the corresponding ground-truth (third column) to show our high-quality NeRF reconstruction, from which we can also easily extract meshes (last column) by fusing the multi-view RGBD images rendered from NeRF using RGBD fusion (Curless & Levoy, 2023). More visual examples can be found in Fig. 7 in the appendix.

Although the SfM method HLoc solves for poses and 3D shape (in the form of sparse point cloud) at the same time, it relies on feature matching across views which is extremely challenging in the case of sparse-views; hence it performs poorly in our application scenario.

4.2.2 RECONSTRUCTION QUALITY

We use the surrogate view synthesis quality to compare the quality of our reconstructed NeRF to that of FORGE (Jiang et al., 2022). To isolate the influence of inaccurate masks on measuring the view synthesis quality, we evaluate on unseen OmniObject3D, GSO, and ABO datasets and compare

with the baselines FORGE. In this experiment, we use the same input settings as in the above pose prediction comparisons. We use PSNR, SSIM (Wang et al., 2004), and LPIPS (Zhang et al., 2018) as image metrics.

As shown in Tab. 2, our *PF-LRM* achieves an average PSNR of 24.8 on OmniObject3D, GSO, and ABO datasets, while the baseline FORGE’s average PSNR is only 13.4. This shows that our model generalizes very well and produce high-quality reconstructions on unseen datasets while FORGE does not. Note that we actually feed images with black background into FORGE, and evaluate PSNR using images with black background; this is, in fact, an evaluation setup that bias towards FORGE, as images with black background tends to have higher PSNR than those with white background.

On the other hand, we think there’s an important objective to fulfill in the task of joint pose and NeRF prediction; that is, the predicted NeRF, when rendered at predicted poses, should match well the input unposed images. This is an objective complimentary to the novel view quality and requiring accurate predictions of both poses and NeRF. We show in Tab. 2 that FORGE does poorly on this goal evidenced by the low PSNR scores, especially on the GSO and ABO datasets. In contrast, we perform much better.

In general, our model learns a generic shape prior effectively from massive multi-view datasets including Objaverse and MVImgNet, thanks to its scalable single-stream transformer design. FORGE’s multi-stage training, though, is challenging to scale due to error accumulation across stages. Fig. 3 qualitatively shows the high-quality NeRF reconstruction and accurate pose prediction from our model. Renderings of the our predicted NeRF using our predicted poses closely match the input images, and the novel view rendering resembles the ground-truth a lot. We also demonstrate high-quality extracted meshes from our reconstructed NeRF; the meshes are extracted by first rendering out 100 RGBD images uniformly distributed in a sphere and then fusing them using RGBD fusion (Curless & Levoy, 2023).

Table 2: On 3D reconstruction task, we compare novel view synthesis quality with baseline FORGE (Jiang et al., 2022) on OmniObject3D (Wu et al., 2023), GSO (Downs et al., 2022), ABO (Collins et al., 2022) datasets. Neither methods are trained on these evaluation datasets. Note that both methods predict input cameras’ poses and hence the predicted NeRF are aligned with their own predicted cameras; we align the predicted input cameras to the ground-truth one, and transform the reconstructed NeRF accordingly before rendering them with novel-view cameras for computing the image metrics. We show evaluate renderings of the predicted NeRF at the predicted camera poses against the inputs to show how consistent both predictions are in terms of matching inputs.

Method	OmniObject3D			Google Scanned Objects			Amazon Berkeley Objects		
	PSNR \uparrow	SSIM \uparrow	LPIPS \downarrow	PSNR \uparrow	SSIM \uparrow	LPIPS \downarrow	PSNR \uparrow	SSIM \uparrow	LPIPS \downarrow
Evaluate renderings of our predicted NeRF at novel-view poses									
FORGE	17.95	0.800	0.215	11.43	0.754	0.760	10.92	0.669	0.325
Ours	23.02	0.877	0.083	25.04	0.879	0.096	26.23	0.887	0.097
Evaluate renderings of our predicted NeRF at our predicted poses									
FORGE	19.03	0.829	0.189	11.90	0.760	0.202	11.32	11.32	0.209
Ours	27.27	0.916	0.054	27.01	0.914	0.0645	27.19	0.894	0.083

4.3 ROBUSTNESS TESTS

Variable number of input views. Our model naturally supports variable number of input views as a result of the transformer-based architecture. We test our model’s performance on variable number of input images on the 500 selected GSO objects (see Sec. 4.1). As shown in Tab. 3, with decreased number of views, we observe a consistent drop in reconstruction quality and pose prediction quality, but the performance degradation is acceptable. Note that for pose evaluation, we only evaluate the relative pose errors of the first two views for fair comparison. $PSNR_{input}$ reflects how well our model’s predicted NeRF and poses can explain the input images, while the $PSNR_{all}$ is an aggregated metrics including both input views and held-out novel views (we have 4 views in total for each object).

Imperfect segmentation masks. In this experiment we add noises on the input segmentation masks by adding different levels of elastic transform (Simard et al., 2003). As shown in Tab. 4, we can see that our model is robust to certain level of noise, but its performance drop significantly when the

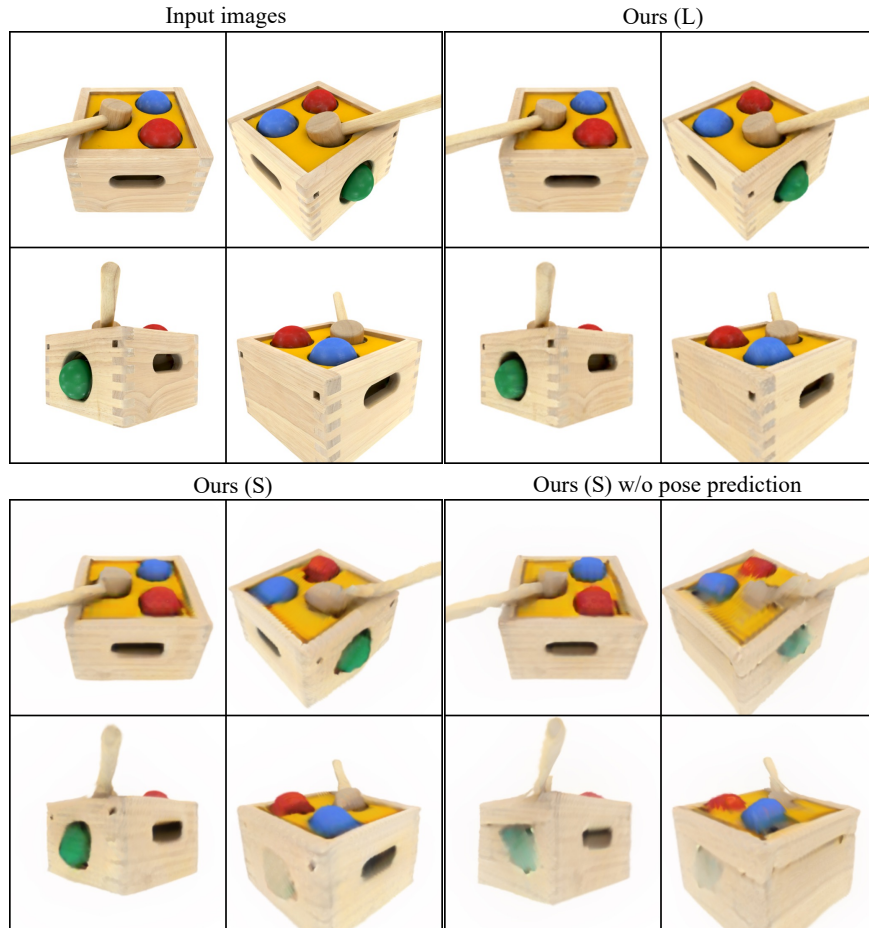


Figure 4: Ablation studies on GSO data (Downs et al., 2022). ‘Ours (L)’ results in highest reconstruction quality with sharpest details, while reducing the model size (‘Ours (S)’) causes the texture to become blur. Further removing pose prediction branch (‘Ours (S) w/o pose prediction’) makes the texture even worse. Note that for a fair comparison of different ablation variants, especially the one without pose prediction, we render out our reconstructed NeRF using the same *ground-truth* poses corresponding to input images (as opposed to predicted ones).

Table 3: Inference on variable number of input views on unseen GSO dataset using our *PF-LRM* trained on 4 views (no re-training or fine-tuning is involved). For pose evaluation, we only evaluate the relative pose errors of the first two views for fair comparison.

#Views	R. error	Acc.@15°	Acc.@30°	PSNR _{input}	PSNR _{all}
4	4.19	0.956	0.974	27.76	27.76
3	5.83	0.946	0.962	27.59	26.76
2	10.38	0.886	0.924	27.35	24.87
1	-	-	-	29.27	21.56

masks are very noisy. This is also aligned with the observation that the inaccurate masks provided by CO3D (Reizenstein et al., 2021) can harm our model’s performance on it, e.g., the Couch category in Tab. 6 of the appendix. Note that PSNR_{g.t.} reflects how well renderings of our predicted NeRF using ground-truth input poses match the input images, while PSNR_{pred} measures how well renderings of our predicted NeRF using our pose predictions match the inputs.

Table 4: Inference on images with varying level of segmentation mask errors on unseen GSO dataset using our *PF-LRM*.

Noise level	R. error	Acc.@15°	Acc.@30°	T. error	PSNR _{g.t.}	PSNR _{pred.}
0	2.46	0.976	0.985	0.026	29.42	28.38
1	4.84	0.951	0.968	0.050	27.19	26.84
2	7.15	0.921	0.946	0.075	26.25	26.26
3	10.34	0.881	0.916	0.106	25.515	25.567
4	14.13	0.844	0.894	0.141	24.934	24.975

Table 5: Ablation study of model size and training objectives on the GSO dataset.

Setting	R. error	Acc.@15°	Acc.@30°	T. error	PSNR _{g.t.}	PSNR _{pred.}
Ours (L)	2.46	0.976	0.985	0.026	29.42	28.38
Ours (S)	13.08	0.848	0.916	0.135	23.80	22.82
- NeRF Pred. (S)	111.89	0.000	0.000	1.630	-	-
- pose Pred. (S)	-	-	-	-	22.48	-

4.4 ABLATION STUDIES

In the ablation studies, we train our models with different settings on the synthetic Objaverse dataset (Deitke et al., 2023) and evaluate on GSO dataset (Downs et al., 2022) to isolate the influence of noisy background removals. For better energy efficiency, we conduct ablations mostly on a smaller version of our model, dubbed as Ours (S). It has 24 self-attention layers with 1024 token dimension, and is trained on 8 A100 GPUs for 20 epochs (~100k iterations), which takes around 5 days. In addition, to show the scaling law with respect to model sizes, we train a large model (Ours (L)) on 128 GPUs for 100 epochs (~70k iterations).

Using smaller model. ‘Ours (L)’ outperforms the smaller one ‘Ours (S)’ by a great margin in terms of pose prediction accuracy and NeRF reconstruction quality, as shown in Tab. 5 and Fig. 4. It aligns with the recent findings that larger model can learn better from data (Hong et al., 2023).

Removing NeRF prediction. We evaluated two different settings without NeRF prediction: 1) using differentiable PnP for pose prediction as described in Sec. 3.3; 2) using MLP to directly predict poses from the concatenated patch features. For 1), we notice that the training becomes very unstable and tends to diverge in this case, as we find that our point loss (Eqn. 6; relying on NeRF prediction for supervision) helps stabilize the differentiable PnP loss (Eqn. 11). For 2), we find that the predicted pose is almost random, as shown in Tab. 5; this indicates that the training and evaluation cases of highly sparse views (e.g., four images looking at the front, back, left- and right-side parts of an object) seem to pose a convergence challenge for a purely images-to-poses regressor when trained on the massive Objaverse dataset (Deitke et al., 2023).

Removing pose prediction. We find that jointly predicting pose helps the model learn better 3D reconstruction with sharper textures, as shown in Tab. 5 (comparing ‘-pose Pred. (S)’ and ‘Ours (S)’) and Fig. 4 (comparing ‘Our (S) w/o pose prediction’ and ‘Ours (S)’). This could be that by forcing the model to figure out the correct spatial relationship of input views, we reduce the uncertainty and difficulty of shape reconstruction.

4.5 APPLICATION

Text/image-to-3D generation. Since our model can reconstruct NeRF from 2-4 unposed images, it can be readily used in downstream text-to-3D applications to build highly efficient two-stage 3D generation pipelines. In the first stage, one can use geometry-free multi-view image generators, e.g., MVDream (Shi et al., 2023b), Instant3D (Li et al., 2023), to generate a few images from a user-provided text prompt. Then the unposed generated images can be instantly lifted into 3D by our *PF-LRM* with a single feed-forward inference (see Fig. 1). Or alternatively, one can generate a single image from text prompts using Stable Diffusion (Rombach et al., 2022), feed the single image to image-conditioned generators, e.g., Zero-1-to-3 (Liu et al., 2023a), Zero123++ (Shi et al., 2023a), to generate at least one additional view, then reconstruct a NeRF from the multiple unposed images

using our *PF-LRM*. In the latter approach, we can have a feed-forward single-image-to-3D pipeline as well, if the text-to-image step is skipped, as shown in Fig. 1.

5 CONCLUSION

In this work, we propose a large reconstruction model based on the transformer architecture to jointly estimate camera parameters and reconstruct 3D shapes in the form of NeRF. Our model employs self-attention to allow triplane tokens and image patch tokens to communicate information with each other, leading to improved NeRF reconstruction quality and robust per-patch surface point prediction for solving poses using a differentiable PnP solver. Trained on multi-view posed renderings of the large-scale Objaverse and real MImgNet datasets, our model outperforms baseline renderings by a large margin in terms of pose prediction accuracy and reconstruction quality. We also show that our model can be leveraged in downstream applications like text/image-to-3D generation.

Limitations. Despite the impressive reconstruction and pose prediction performance of our model, there are a few limitations to be addressed in future works: 1) First, we ignore the background information that might contain rich cues about camera poses, e.g., vanishing points, casting shadows, etc, while predicting camera poses. It will be interesting to extend our work to handle background with spatial warpings as in (Zhang et al., 2020; Barron et al., 2022). 2) Second, we are also not able to model view-dependent effects due to our modelling choice of per-point colors, compared with NeRF (Mildenhall et al., 2020; Verbin et al., 2022). Future work will include recovering view-dependent appearance from sparse views. 3) The resolution of our predicted triplane NeRF can also be further increased by exploring techniques like coarse-to-fine modelling or other high-capacity compact representations, e.g., multi-resolution hashgrid (Müller et al., 2022), to enable more detailed geometry and texture reconstructions. 4) Our model currently assumes known intrinsics (see Sec. 3.1) from the camera sensor metadata or a reasonable user guess; future work can explore techniques to predict camera intrinsics as well. 5) Although our model is pose-free during test time, it still requires ground-truth pose supervision to train; an intriguing direction is to lift the camera pose requirement during training in order to consume massive in-the-wild video training data.

Ethics Statement. The model proposed in this paper is a reconstruction model that can convert multi-view images to the 3D shapes. This techniques can be used to reconstruct images with human. However, the current shape resolution is still relatively low which would not get accurate reconstruction of the face region/hand region. The model is trained to be a deterministic model thus it is hard to leak the data used in training. The users can use this model to reconstruct the shape of the images where there might be a commercial copyright of the shape. This model also utilizes a training compute that is significantly larger than previous 3D reconstruction models. Thus the model can potentially lead to a trend of pursuing large reconstruction models in the 3D domain, which further can introduce the environmental concerns like the current trend of large language model.

Reproducibility Statement. We have elucidate our model design in the paper including the training architecture (transformer in Sec. 3.1, NeRF rendering in Sec. 3.2) the losses (pose loss in Sec. 3.3 and final loss in Sec. 3.4). The training details are shown in Sec. 3.4 and further extended in Appendix. We also pointed to the exact implementation of the Diff. PnP method in Sec. 3.3 to resolve uncertainty over the detailed implementation. Lastly, we will involve in the discussion regarding implementation details of our paper.

Acknowledgement. We want to thank Nathan Carr, Duygu Ceylan, Paul Guerrero, Chun-Hao Huang, and Niloy Mitra for discussions on this project. We thank Yuan Liu for helpful discussions on pose estimation.

REFERENCES

Henrik Aanæs, Rasmus Ramsbøl Jensen, George Vogiatzis, Engin Tola, and Anders Bjarholm Dahl. Large-scale data for multiple-view stereopsis. *International Journal of Computer Vision*, pp. 1–16, 2016.

-
- Connelly Barnes, Eli Shechtman, Adam Finkelstein, and Dan B Goldman. Patchmatch: A randomized correspondence algorithm for structural image editing. *ACM Trans. Graph.*, 28(3):24, 2009.
- Jonathan T Barron, Ben Mildenhall, Dor Verbin, Pratul P Srinivasan, and Peter Hedman. Mip-nerf 360: Unbounded anti-aliased neural radiance fields. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 5470–5479, 2022.
- Eric Brachmann, Alexander Krull, Sebastian Nowozin, Jamie Shotton, Frank Michel, Stefan Gumhold, and Carsten Rother. Dsac-differentiable ransac for camera localization. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 6684–6692, 2017.
- Ruojin Cai, Bharath Hariharan, Noah Snavely, and Hadar Averbuch-Elor. Extreme rotation estimation using dense correlation volumes. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 14566–14575, 2021.
- Zhongang Cai, Daxuan Ren, Ailing Zeng, Zhengyu Lin, Tao Yu, Wenjia Wang, Xiangyu Fan, Yang Gao, Yifan Yu, Liang Pan, Fangzhou Hong, Mingyuan Zhang, Chen Change Loy, Lei Yang, and Ziwei Liu. HuMMan: Multi-modal 4d human dataset for versatile sensing and modeling. In *17th European Conference on Computer Vision, Tel Aviv, Israel, October 23–27, 2022, Proceedings, Part VII*, pp. 557–577. Springer, 2022.
- Mathilde Caron, Hugo Touvron, Ishan Misra, Hervé Jégou, Julien Mairal, Piotr Bojanowski, and Armand Joulin. Emerging properties in self-supervised vision transformers. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 9650–9660, 2021.
- Eric R Chan, Connor Z Lin, Matthew A Chan, Koki Nagano, Boxiao Pan, Shalini De Mello, Orazio Gallo, Leonidas J Guibas, Jonathan Tremblay, Sameh Khamis, et al. Efficient geometry-aware 3d generative adversarial networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 16123–16133, 2022.
- Anpei Chen, Zexiang Xu, Fuqiang Zhao, Xiaoshuai Zhang, Fanbo Xiang, Jingyi Yu, and Hao Su. Mvsnerf: Fast generalizable radiance field reconstruction from multi-view stereo. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 14124–14133, 2021.
- Anpei Chen, Zexiang Xu, Andreas Geiger, Jingyi Yu, and Hao Su. Tensorf: Tensorial radiance fields. In *European Conference on Computer Vision (ECCV)*, 2022a.
- Hansheng Chen, Pichao Wang, Fan Wang, Wei Tian, Lu Xiong, and Hao Li. Epro-pnp: Generalized end-to-end probabilistic perspective-n-points for monocular object pose estimation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 2781–2790, 2022b.
- Yen-Chun Chen, Linjie Li, Licheng Yu, Ahmed El Kholy, Faisal Ahmed, Zhe Gan, Yu Cheng, and Jingjing Liu. Uniter: Universal image-text representation learning. In *European conference on computer vision*, pp. 104–120. Springer, 2020.
- Jasmine Collins, Shubham Goel, Kenan Deng, Achleshwar Luthra, Leon Xu, Erhan Gundogdu, Xi Zhang, Tomas F Yago Vicente, Thomas Dideriksen, Himanshu Arora, et al. Abo: Dataset and benchmarks for real-world 3d object understanding. In *CVPR*, pp. 21126–21136, 2022.
- Brian Curless and Marc Levoy. *A Volumetric Method for Building Complex Models from Range Images*. Association for Computing Machinery, New York, NY, USA, 1 edition, 2023. ISBN 9798400708978. URL <https://doi.org/10.1145/3596711.3596726>.
- Tri Dao. Flashattention-2: Faster attention with better parallelism and work partitioning. *arXiv preprint arXiv:2307.08691*, 2023.
- Matt Deitke, Dustin Schwenk, Jordi Salvador, Luca Weihs, Oscar Michel, Eli VanderBilt, Ludwig Schmidt, Kiana Ehsani, Aniruddha Kembhavi, and Ali Farhadi. Objaverse: A universe of annotated 3d objects. In *CVPR*, pp. 13142–13153, 2023.

-
- Kangle Deng, Andrew Liu, Jun-Yan Zhu, and Deva Ramanan. Depth-supervised NeRF: Fewer views and faster training for free. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2022.
- Daniel DeTone, Tomasz Malisiewicz, and Andrew Rabinovich. Superpoint: Self-supervised interest point detection and description. In *Proceedings of the IEEE conference on computer vision and pattern recognition workshops*, pp. 224–236, 2018.
- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. In *International Conference on Learning Representations*, 2020.
- Laura Downs, Anthony Francis, Nate Koenig, Brandon Kinman, Ryan Hickman, Krista Reymann, Thomas B McHugh, and Vincent Vanhoucke. Google scanned objects: A high-quality dataset of 3d scanned household items. In *2022 International Conference on Robotics and Automation (ICRA)*, pp. 2553–2560. IEEE, 2022.
- Mihai Dusmanu, Ignacio Rocco, Tomas Pajdla, Marc Pollefeys, Josef Sivic, Akihiko Torii, and Torsten Sattler. D2-net: A trainable cnn for joint description and detection of local features. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 8092–8101, 2019.
- Yasutaka Furukawa and Jean Ponce. Accurate, dense, and robust multiview stereopsis. *IEEE transactions on pattern analysis and machine intelligence*, 32(8):1362–1376, 2009.
- Yicong Hong, Kai Zhang, Jiuxiang Gu, Sai Bi, Yang Zhou, Difan Liu, Feng Liu, Kalyan Sunkavalli, Trung Bui, and Hao Tan. Lrm: Large reconstruction model for single image to 3d. 2023.
- Xun Huang and Serge Belongie. Arbitrary style transfer in real-time with adaptive instance normalization. In *Proceedings of the IEEE international conference on computer vision*, pp. 1501–1510, 2017.
- Muhammad Zubair Irshad, Sergey Zakharov, Katherine Liu, Vitor Guizilini, Thomas Kollar, Adrien Gaidon, Zsolt Kira, and Rares Ambrus. Neo 360: Neural fields for sparse view synthesis of outdoor scenes. 2023. URL <https://arxiv.org/abs/2308.12967>.
- Hanwen Jiang, Zhenyu Jiang, Kristen Grauman, and Yuke Zhu. Few-view object reconstruction with unknown categories and camera poses. *ArXiv*, 2212.04492, 2022.
- Mijeong Kim, Seonguk Seo, and Bohyung Han. Infonerf: Ray entropy minimization for few-shot neural volume rendering. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 12912–12921, 2022.
- Jiahao Li, Hao Tan, Kai Zhang, Zexiang Xu, Fujun Luan, Yinghao Xu, Yicong Hong, Kalyan Sunkavalli, Greg Shakhnarovich, and Sai Bi. Instant3d: Fast text-to-3d with sparse-view generation and large reconstruction model. 2023.
- Liunian Harold Li, Mark Yatskar, Da Yin, Cho-Jui Hsieh, and Kai-Wei Chang. Visualbert: A simple and performant baseline for vision and language. *arXiv preprint arXiv:1908.03557*, 2019.
- Amy Lin, Jason Y Zhang, Deva Ramanan, and Shubham Tulsiani. Relpose++: Recovering 6d poses from sparse-view observations. *arXiv preprint arXiv:2305.04926*, 2023a.
- Chen-Hsuan Lin, Jun Gao, Luming Tang, Towaki Takikawa, Xiaohui Zeng, Xun Huang, Karsten Kreis, Sanja Fidler, Ming-Yu Liu, and Tsung-Yi Lin. Magic3d: High-resolution text-to-3d content creation. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2023b.
- Ruoshi Liu, Rundi Wu, Basile Van Hoorick, Pavel Tokmakov, Sergey Zakharov, and Carl Vondrick. Zero-1-to-3: Zero-shot one image to 3d object, 2023a.
- Yuan Liu, Lingjie Liu, Cheng Lin, Zhen Dong, and Wenping Wang. Learnable motion coherence for correspondence pruning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 3237–3246, 2021.

-
- Yuan Liu, Cheng Lin, Zijiao Zeng, Xiaoxiao Long, Lingjie Liu, Taku Komura, and Wenping Wang. Syncdreamer: Generating multiview-consistent images from a single-view image. *arXiv preprint arXiv:2309.03453*, 2023b.
- Xiaoxiao Long, Cheng Lin, Peng Wang, Taku Komura, and Wenping Wang. Sparseneus: Fast generalizable neural surface reconstruction from sparse views. In *European Conference on Computer Vision*, pp. 210–227. Springer, 2022.
- Xiaoxiao Long, Yuan-Chen Guo, Cheng Lin, Yuan Liu, Zhiyang Dou, Lingjie Liu, Yuexin Ma, Song-Hai Zhang, Marc Habermann, Christian Theobalt, and Wenping Wang. Wonder3d: Single image to 3d using cross-domain diffusion, 2023.
- Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101*, 2017.
- Wei-Chiu Ma, Anqi Joyce Yang, Shenlong Wang, Raquel Urtasun, and Antonio Torralba. Virtual correspondence: Humans as a cue for extreme-view geometry. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 15924–15934, June 2022.
- Ben Mildenhall, Pratul P. Srinivasan, Matthew Tancik, Jonathan T. Barron, Ravi Ramamoorthi, and Ren Ng. Nerf: Representing scenes as neural radiance fields for view synthesis. In *ECCV*, 2020.
- Roger Mohr, Long Quan, and Françoise Veillon. Relative 3d reconstruction using multiple uncalibrated images. *The International Journal of Robotics Research*, 14(6):619–632, 1995.
- Thomas Müller, Alex Evans, Christoph Schied, and Alexander Keller. Instant neural graphics primitives with a multiresolution hash encoding. *ACM Transactions on Graphics (ToG)*, 41(4):1–15, 2022.
- Michael Niemeyer, Jonathan T Barron, Ben Mildenhall, Mehdi SM Sajjadi, Andreas Geiger, and Noha Radwan. Regnerf: Regularizing neural radiance fields for view synthesis from sparse inputs. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 5480–5490, 2022.
- William Peebles and Saining Xie. Scalable diffusion models with transformers. *arXiv preprint arXiv:2212.09748*, 2022.
- Songyou Peng, Michael Niemeyer, Lars Mescheder, Marc Pollefeys, and Andreas Geiger. Convolutional occupancy networks. In *Computer Vision–ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part III 16*, pp. 523–540. Springer, 2020.
- Ben Poole, Ajay Jain, Jonathan T Barron, and Ben Mildenhall. Dreamfusion: Text-to-3d using 2d diffusion. *arXiv preprint arXiv:2209.14988*, 2022.
- Jeremy Reizenstein, Roman Shapovalov, Philipp Henzler, Luca Sbordone, Patrick Labatut, and David Novotny. Common objects in 3d: Large-scale learning and evaluation of real-life 3d category reconstruction. In *International Conference on Computer Vision*, 2021.
- Yufan Ren, Tong Zhang, Marc Pollefeys, Sabine Süsstrunk, and Fangjinhua Wang. Volrecon: Volume rendering of signed ray distance functions for generalizable multi-view reconstruction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 16685–16695, 2023.
- Jerome Revaud, Philippe Weinzaepfel, César De Souza, Noe Pion, Gabriela Csurka, Yohann Cabon, and Martin Humenberger. R2d2: repeatable and reliable detector and descriptor. *arXiv preprint arXiv:1906.06195*, 2019.
- Chris Rockwell, Justin Johnson, and David F Fouhey. The 8-point algorithm as an inductive bias for relative pose prediction by vits. In *2022 International Conference on 3D Vision (3DV)*, pp. 1–11. IEEE, 2022.
- Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 10684–10695, 2022.

-
- Mehdi S. M. Sajjadi, Henning Meyer, Etienne Pot, Urs Bergmann, Klaus Greff, Noha Radwan, Suhani Vora, Mario Lucic, Daniel Duckworth, Alexey Dosovitskiy, Jakob Uszkoreit, Thomas Funkhouser, and Andrea Tagliasacchi. Scene Representation Transformer: Geometry-Free Novel View Synthesis Through Set-Latent Scene Representations. *CVPR*, 2022. URL <https://srt-paper.github.io/>.
- Paul-Edouard Sarlin, Cesar Cadena, Roland Siegwart, and Marcin Dymczyk. From coarse to fine: Robust hierarchical localization at large scale. In *CVPR*, 2019.
- Paul-Edouard Sarlin, Daniel DeTone, Tomasz Malisiewicz, and Andrew Rabinovich. Superglue: Learning feature matching with graph neural networks. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 4938–4947, 2020.
- Johannes L Schonberger and Jan-Michael Frahm. Structure-from-motion revisited. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 4104–4113, 2016.
- Johannes Lutz Schönberger, Enliang Zheng, Marc Pollefeys, and Jan-Michael Frahm. Pixelwise view selection for unstructured multi-view stereo. In *European Conference on Computer Vision (ECCV)*, 2016.
- Ruoxi Shi, Hansheng Chen, Zhuoyang Zhang, Minghua Liu, Chao Xu, Xinyue Wei, Linghao Chen, Chong Zeng, and Hao Su. Zero123++: a single image to consistent multi-view diffusion base model, 2023a.
- Yichun Shi, Peng Wang, Jianglong Ye, Long Mai, Kejie Li, and Xiao Yang. Mvdream: Multi-view diffusion for 3d generation. *arXiv:2308.16512*, 2023b.
- Jamie Shotton, Ben Glocker, Christopher Zach, Shahram Izadi, Antonio Criminisi, and Andrew Fitzgibbon. Scene coordinate regression forests for camera relocalization in rgb-d images. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 2930–2937, 2013.
- Patrice Y Simard, David Steinkraus, John C Platt, et al. Best practices for convolutional neural networks applied to visual document analysis. In *Icdar*, volume 3. Edinburgh, 2003.
- Samarth Sinha, Jason Y Zhang, Andrea Tagliasacchi, Igor Gilitschenski, and David B Lindell. Sparsepose: Sparse-view camera pose regression and refinement. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 21349–21359, 2023.
- Cameron Omid Smith, Yilun Du, Ayush Tewari, and Vincent Sitzmann. Flowcam: Training generalizable 3d radiance fields without camera poses via pixel-aligned scene flow. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. URL <https://openreview.net/forum?id=apFDDJOYf5>.
- Noah Snavely, Steven M Seitz, and Richard Szeliski. Photo tourism: exploring photo collections in 3d. In *ACM siggraph 2006 papers*, pp. 835–846. 2006.
- Dor Verbin, Peter Hedman, Ben Mildenhall, Todd Zickler, Jonathan T Barron, and Pratul P Srinivasan. Ref-nerf: Structured view-dependent appearance for neural radiance fields. In *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 5481–5490. IEEE, 2022.
- Guangcong Wang, Zhaoxi Chen, Chen Change Loy, and Ziwei Liu. Sparsenerf: Distilling depth ranking for few-shot novel view synthesis. *arXiv preprint arXiv:2303.16196*, 2023.
- Peng Wang, Lingjie Liu, Yuan Liu, Christian Theobalt, Taku Komura, and Wenping Wang. Neus: Learning neural implicit surfaces by volume rendering for multi-view reconstruction. In *Advances in Neural Information Processing Systems*, 2021.
- Zhou Wang, Alan C Bovik, Hamid R Sheikh, and Eero P Simoncelli. Image quality assessment: from error visibility to structural similarity. *IEEE transactions on image processing*, 13(4):600–612, 2004.

-
- Tong Wu, Jiarui Zhang, Xiao Fu, Yuxin Wang, Jiawei Ren, Liang Pan, Wayne Wu, Lei Yang, Jiaqi Wang, Chen Qian, et al. Omniobject3d: Large-vocabulary 3d object dataset for realistic perception, reconstruction and generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 803–814, 2023.
- Yinghao Xu, Hao Tan, Fujun Luan, Sai Bi, Peng Wang, Jiahao Li, Zifan Shi, Kalyan Sunkavalli, Gordon Wetzstein, Zexiang Xu, and Kai Zhang. Dmv3d: Denoising multi-view diffusion using 3d large reconstruction model, 2023.
- Jiawei Yang, Marco Pavone, and Yue Wang. Freenerf: Improving few-shot neural rendering with free frequency regularization. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 8254–8263, 2023.
- Zhenpei Yang, Zhile Ren, Miguel Angel Bautista, Zaiwei Zhang, Qi Shan, and Qixing Huang. Fvor: Robust joint shape and pose optimization for few-view object reconstruction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 2497–2507, 2022.
- Lior Yariv, Yoni Kasten, Dror Moran, Meirav Galun, Matan Atzmon, Basri Ronen, and Yaron Lipman. Multiview neural surface reconstruction by disentangling geometry and appearance. *Advances in Neural Information Processing Systems*, 33:2492–2502, 2020.
- Lior Yariv, Jiatao Gu, Yoni Kasten, and Yaron Lipman. Volume rendering of neural implicit surfaces. In *Thirty-Fifth Conference on Neural Information Processing Systems*, 2021.
- Jianglong Ye, Peng Wang, Kejie Li, Yichun Shi, and Heng Wang. Consistent-1-to-3: Consistent image to 3d view synthesis via geometry-aware diffusion models. *arXiv preprint arXiv:2310.03020*, 2023.
- Alex Yu, Vickie Ye, Matthew Tancik, and Angjoo Kanazawa. pixelnerf: Neural radiance fields from one or few images. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 4578–4587, 2021.
- Xianggang Yu, Mutian Xu, Yidan Zhang, Haolin Liu, Chongjie Ye, Yushuang Wu, Zizheng Yan, Chenming Zhu, Zhangyang Xiong, Tianyou Liang, et al. Mvimgnet: A large-scale dataset of multi-view images. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 9150–9161, 2023.
- Kai Zhang, Gernot Riegler, Noah Snavely, and Vladlen Koltun. Nerf++: Analyzing and improving neural radiance fields. *arXiv preprint arXiv:2010.07492*, 2020.
- Kai Zhang, Nick Kolkin, Sai Bi, Fujun Luan, Zexiang Xu, Eli Shechtman, and Noah Snavely. Arf: Artistic radiance fields, 2022.
- Richard Zhang, Phillip Isola, Alexei A Efros, Eli Shechtman, and Oliver Wang. The unreasonable effectiveness of deep features as a perceptual metric. In *CVPR*, 2018.
- Zhizhuo Zhou and Shubham Tulsiani. Sparsefusion: Distilling view-conditioned diffusion for 3d reconstruction. In *CVPR*, 2023.

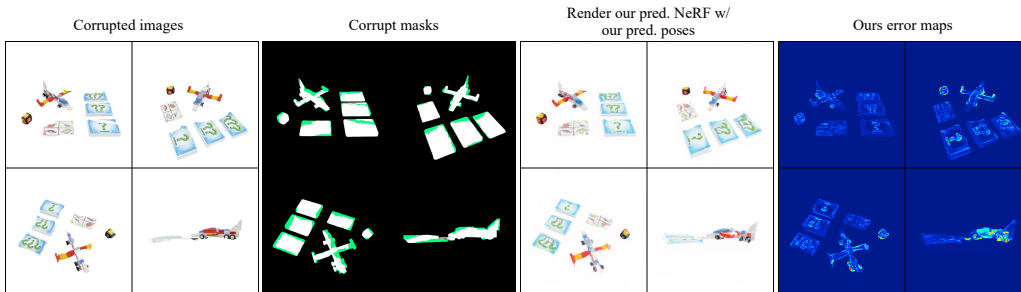


Figure 5: Our *PF-LRM* is robust to small mask segmentation errors.

A APPENDIX

A.1 VISUAL COMPARISONS OF PREDICTED CAMERA POSES

In Fig. 6, we present visual comparisons of the predicted camera poses with our method and baseline methods. We can see that it’s common for baseline methods FORGE (Jiang et al., 2022) and RelPose++ (Lin et al., 2023a) to make predictions significantly deviating from the ground truth and in some situations, their predicted camera poses can be even on the opposite side. In contrast, our predicted poses closely align with the ground truth consistently.

Table 6: Category-level comparison of pose prediction results with baseline RelPose++ (Lin et al., 2023a) on CO3D dataset (Reizenstein et al., 2021). We report the mean pose errors and (top two rows) and rotation accuracy@15° (bottom two rows) on 10 different test categories.

	Ball	Book	Couch	Fris.	Hot.	Kite	Rem.	Sand.	Skate.	Suit.
RelPose++ (w/ bg)	30.29	31.34	24.82	34.01	21.61	50.18	32.00	30.84	36.91	14.13
Ours	17.17	8.36	29.04	20.16	27.88	16.18	6.05	15.92	25.39	12.03
RelPose++ (w/ bg)	0.613	0.782	0.787	0.742	0.742	0.570	0.767	0.697	0.630	0.893
Ours	0.787	0.947	0.688	0.780	0.697	0.807	0.944	0.890	0.778	0.923

A.2 ADDITIONAL EXPERIMENTS

Robustness to novel environment lights. We evaluate our model’s robustness to different environment lights in Table 7. The evaluations are conducted in 100 object samples from GSO dataset (Downs et al., 2022). Our model shows consistent results under different lighting conditions. We also qualitatively shows our model robustness to different illuminations in Fig. 8. Note that $PSNR_{g.t.}$ reflects how well renderings of our predicted NeRF using ground-truth input poses match the input images, while $PSNR_{pred}$ measures how well renderings of our predicted NeRF using our poses predictions match the inputs.

Table 7: Evaluation results on GSO data with different novel environment lights. The evaluations are conducted in 100 objects samples. Note our synthesized multi-view training images are rendered using uniform light. Our method can generalize well to novel environment lights.

Method	R. error	Acc.@15°	Acc.@30°	T. error	PSNR _{g.t.}	PSNR _{pred.}
Sunset	2.40	0.968	0.983	0.027	27.56	26.74
Sunrise	2.22	0.985	0.993	0.024	27.17	26.21
Studio	2.82	0.983	0.992	0.029	27.31	26.69
Uniform	3.94	0.968	0.972	0.040	27.50	26.80

Ablations of pose prediction methods. We illustrate the effectiveness of our differentiable PnP pose prediction method in Tab. 10 by replacing it with alternative solutions. The first line ‘diff. PnP’ is our model with small config, i.e., ‘Ours (S)’. For other lines, we replace the ‘diff. PnP’ with other alternatives. ‘MLP pose (CLS token)’ takes the [CLS] token of each view in the last transformer layer to a MLP to predict pose, and supervise pose with a quaternion loss and a translation loss.

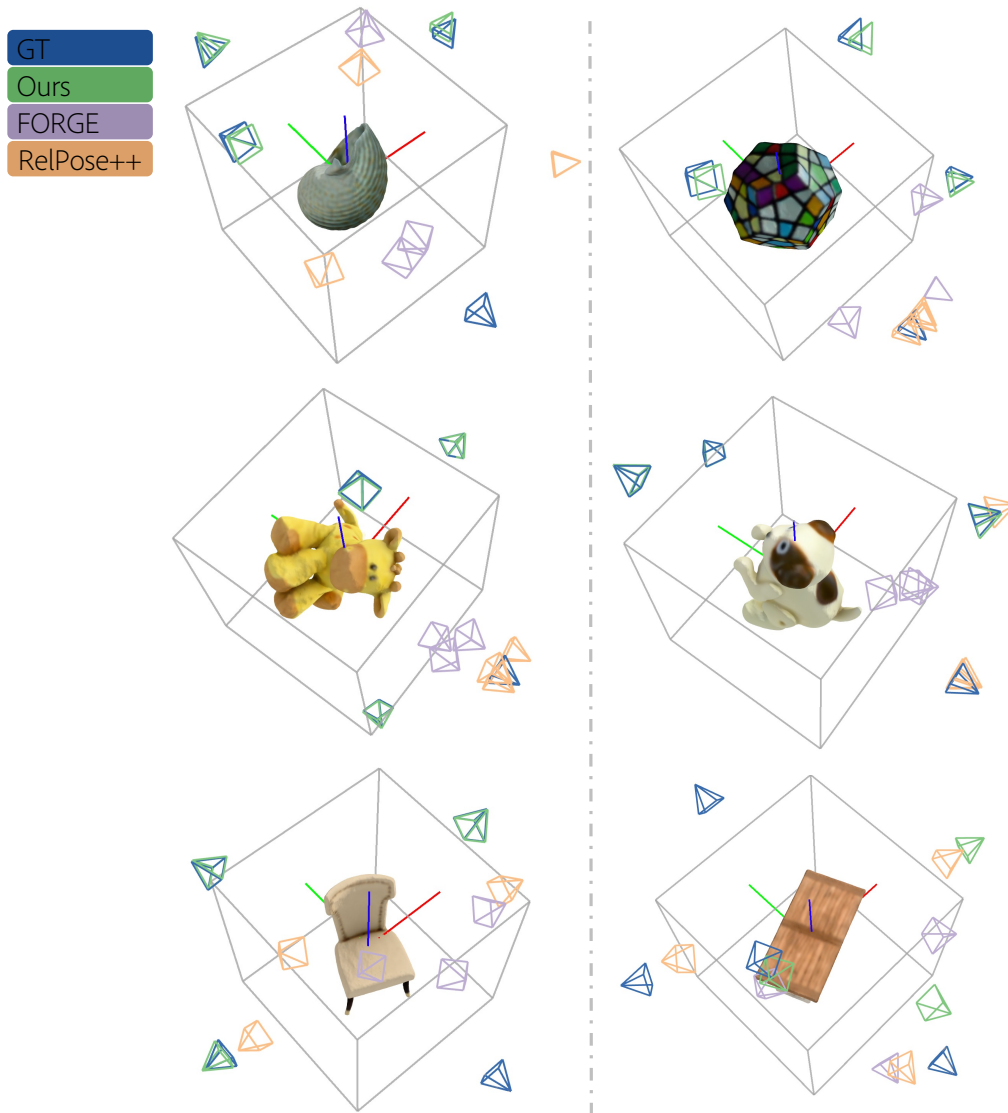


Figure 6: Predicted poses from our method align much more closely with the ground-truth than those from baseline methods including FORGE (Jiang et al., 2022), RelPose++ (Lin et al., 2023a).

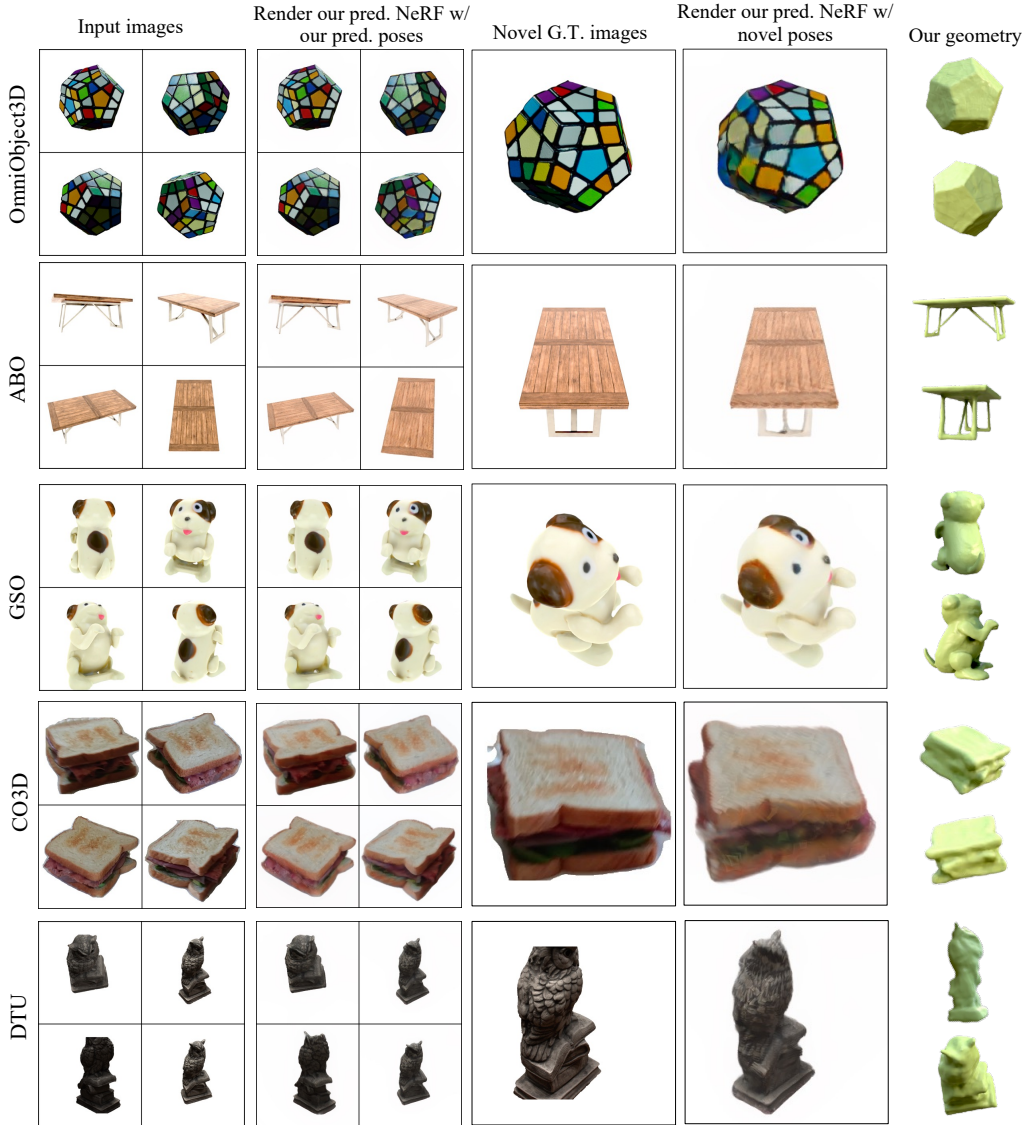


Figure 7: Additional qualitative results of our model’s cross-dataset generalization to unseen OmniObject3D (Wu et al., 2023), GSO (Downs et al., 2022), ABO (Collins et al., 2022), CO3D (Reizenstein et al., 2021), and DTU (Aanæs et al., 2016) datasets.

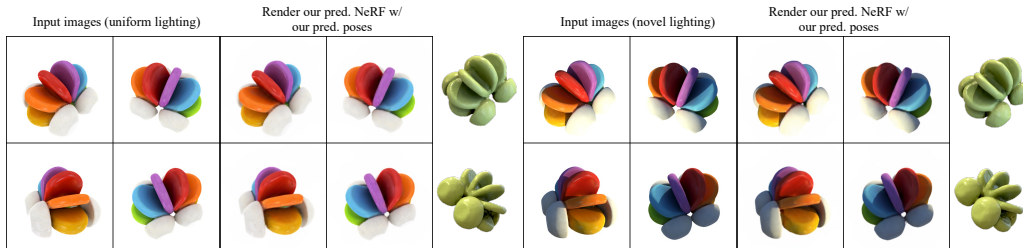


Figure 8: Our *PF-LRM* is robust to illumination changes.

Although this model can predict plausible reconstructions and poses, its performance is far worse than our full model where we use a differentiable PnP solver to predict poses. We argue that this is because pose prediction has multiple local minimas, and the regression-based pose loss is more prone to such local minimas, compared with the EPro-PnP solver (Chen et al., 2022b) we use in this work. ‘MLP pose (Patch tokens)’ take concatenated patch-wise features to a MLP for predicting pose. It aims to leverage more dense patch token information in the pose prediction. The performance of this variant is roughly the same as ‘MLP pose (CLS token)’. ‘non-diff. PnP’ removes the differentiable PnP prediction and only use the losses L_p and L_α . This way, we have a set of 3D-2D correspondences weighted by predicted opacity that are passed to a PnP solver for getting the poses. We find that this variant leads to worse performance than its differentiable PnP counterpart, due to the lack of learning proper confidence of 3D-2D correspondences. Note that $\text{PSNR}_{g.t.}$ reflects how well renderings of our predicted NeRF using ground-truth input poses match the input images, while $\text{PSNR}_{pred.}$ measures how well renderings of our predicted NeRF using our pose predictions match the inputs. We observe that worse pose predictions tend to lead to worse reconstruction quality, as shown by the positive correlation between pose accuracy and $\text{PSNR}_{g.t.}$ scores in Tab. 10.

A.3 ADDITIONAL IMPLEMENTATION DETAILS

Our model uses a pre-trained DINO ViT as our image encoder. We bilinearly interpolate the original positional embedding to the desired image size. For each view, its view encoding vector and camera intrinsics are first mapped to a modulation feature, and then passed to the adaptive layer norm block (Hong et al., 2023; Peebles & Xie, 2022; Huang & Belongie, 2017) to predict scale and bias for modulating the intermediate feature activations inside each transformer block (self-attention + MLP) of the DINO ViT (Caron et al., 2021). Take the reference view as an example; its modulation feature \mathbf{m}_r is defined as:

$$\mathbf{m}_r = \text{MLP}^{\text{intrinsic}}([f_x, f_y, c_x, c_y]) + \mathbf{v}_r, \quad (13)$$

where f_x, f_y, c_x, c_y are camera intrinsics, and \mathbf{v}_r is the view encoding vector. We then use the modulation feature \mathbf{m}_r in the same way as the camera feature in LRM (Li et al., 2023).

We then concatenate the image tokens with the learnable triplane position embedding to get a long token sequence, which is used as input to the single-stream transformer. We use the multi-head attention with head dimension 64. During rendering, the three planes are queried independently and the three features are concatenated as input of the NeRF MLP to get the RGB color and NeRF density. For per-view geometry prediction used for PnP solver, we use the image tokens output by the transformer with MLP layers to get the point predictions, the confidence predictions, and also the alpha predictions.

In our experiments we have models with two different sizes. In the ablation studies as described in Sec. 4.4, the ‘Ours (S)’ model has 24 self-attention layers, while the ‘Ours (L)’ model has 36 self-attention layers. More details of the two model configurations are presented in Tab. 8.

We use the following techniques to save the GPU memory for our model training: 1) Mixed precision with BFloat16, 2) deferred back-propagation in NeRF rendering (Zhang et al., 2022), and 3) Gradient checkpointing at every 4 self-attention layers. We also adopt the FlashAttention V2 (Dao, 2023) to reduce the overall training time.

		Ours (S)	Ours (L)
DINO Encoder	Image resolution	256×256	512×512
	Patch size	16	16
	Att. Layers	12	12
	Attention channels	768	768
	View encoding	768	768
	Intrinsics-cond. MLP layers	5	5
	Intrinsics-cond. MLP width	768	768
	Intrinsics-cond. MLP act.	GeLU	GeLU
Transformer	Triplane tokens	$32 \times 32 \times 3$	$32 \times 32 \times 3$
	Attention channels	1024	1024
	Attention heads	16	16
	Attention layers	24	36
	Triplane upsample	1	2
	Triplane shape	$32 \times 32 \times 3 \times 32$	$64 \times 64 \times 3 \times 32$
Renderer	Rendering patch size	64	128
	Ray-marching steps	64	128
	MLP layers	5	5
	MLP width	64	64
	Activation	ReLU	ReLU
Point MLP	MLP layers	4	4
	MLP width	512	512
	Activation	GeLU	GeLU
Traininig	Learning rate	4e-4	4e-4
	Optimizer	AdamW	AdamW
	Betas	(0.9, 0.95)	(0.9, 0.95)
	Warm-up steps	3000	3000
	Batch size per GPU	16	8
	#GPUS	8	128

Table 8: Configuration of our models.

A.4 ADDITIONAL RESULTS

Category-level results on CO3D dataset. In Tab. 6 we report the per-category results and comparisons to RelPose++ on held-out CO3D test set provided by RelPose++ Lin et al. (2023a). We outperform RelPose++ (*w/bg*) on 8 out of 10 categories, despite that we are not trained on CO3D training set while RelPose++ is. In addition, our model is now limited to handle images without background; hence we use the masks included in the CO3D dataset to remove background before testing our model. The masks, however, seem to be very noisy upon our manual inspection; this negatively influenced our model’s performance, but not RelPose++ (*w/bg*). An interesting future direction is to extend our model to support images with background to in order to lift the impacts of 2D mask errors.

Table 9: Evaluation results on GSO data (Downs et al., 2022) rendered by FORGE (Jiang et al., 2022). We note that these renderings are a bit darker than majority of our training images, but our model still generalizes well to this dataset. Our model produces sharper renderings than FORGE (indicated by the higher SSIM score), while producing more accurate camera estimates.

Method	R. error	Acc.@15°	Acc.@30°	T. error	PSNR _{g.t.}	PSNR _{pred.}	SSIM _{g.t.}	SSIM _{pred.}
FORGE	50.20	0.253	0.514	0.573	21.25	22.90	0.767	0.793
FORGE (refine)	49.02	0.307	0.527	0.548	22.08	25.89	0.767	0.838
Ours	8.37	0.908	0.954	0.105	23.05	24.42	0.860	0.886

A.5 ADDITIONAL CROSS-DATASET EVALUATIONS

To further demonstrate the generalization capability of our model, we evaluate our model (trained on a mixture of Objaverse and MVImgNet) on another version of GSO dataset (Downs et al., 2022)

Table 10: Ablation study of different pose prediction methods on the GSO data (Downs et al., 2022). Ablations are conducted using methods are our small model, i.e., ‘Ours (S)’. Compared with our method of predicting per-view coarse geometry followed by differentiable PnP (Chen et al., 2022b), the MLP-based pose prediction method conditioning on either the per-view CLS token or the concatenated patch tokens perform much worse due to the lack of explicit geometric inductive bias (either 3D-2D correspondences or 2D-2D correspondences) in pose registrations. Besides, we also find that differentiable PnP learns to weigh the 3D-2D correspondences induced from the per-view predicted coarse geometry properly, resulting a boost in pose estimation accuracy.

Setting	R. error	Acc.@15°	Acc.@30°	T. error	PSNR _{g.t.}	PSNR _{pred.}
diff. PnP (our default setting)	13.08	0.848	0.916	0.135	23.80	22.82
MLP pose (CLS token)	25.32	0.655	0.809	0.264	22.27	19.80
MLP pose (Patch tokens)	21.60	0.688	0.836	0.230	22.02	19.76
non-diff. PnP	22.03	0.570	0.814	0.236	23.56	18.65

(which is rendered by the FORGE paper). Note that these renderings are a bit darker than majority of our training images, but as shown in Tab. 1, our model still generalizes well to this dataset. Our model produces sharper renderings than FORGE with and without its per-scene optimization-based refinement (indicated by the higher SSIM score), while producing much more accurate camera estimates. Note that PSNR_{g.t.}, SSIM_{g.t.} reflect how well renderings of our predicted NeRF using ground-truth input poses match the input images, while PSNR_{pred.}, SSIM_{pred.} measures how well renderings of our predicted NeRF using ground-truth input poses match the inputs.

A.6 SCALING UP TRAINING OF RELPOSE++

To further demonstrate our method’s superiority over the baseline method RelPose++ (Lin et al., 2023a), we re-train RelPose++ on the Objaverse dataset until full convergence for a more fair comparison. We then compare the re-trained model with our model (‘Ours (S)’ and ‘Ours (L)’ trained on exactly the same Objaverse renderings in Tab. 11. The re-trained RelPose++ using Objaverse does improve over the pretrained one using CO3D on the unseen test sets, OmniObject3D, GSO and ABO. However, our models (both ‘Ours (S)’ and ‘Ours (L)’ consistently outperform the re-trained baseline by a large margin in terms of rotation and translation prediction accuracy. We attribute this to our joint prediction of NeRF and poses that effectively exploit the synergy between these two tasks; in addition, unlike RelPose++ that regresses poses, we predict per-view coarse point cloud (supervised by distilling our predicted NeRF geometry in an online manner) and use a differentiable solver to get poses. This make us less prone to getting stuck in pose prediction local minimas than regression-based predictors, as also pointed out by Chen et al. (2022b).

Table 11: Comparisons of cross-dataset generalization on GSO (Downs et al., 2022), ABO (Collins et al., 2022), OmniObject3D (Wu et al., 2023) with RelPose++ (Lin et al., 2023a) using the author-provided checkpoint (trained on CO3D (Reizenstein et al., 2021) and our **re-trained** checkpoint (trained on Objaverse (Deitke et al., 2023)). ‘Ours (S)’ and ‘Ours (L)’ are trained only on Objaverse as well for fair comparison. Though the **re-trained** RelPose++ improves over the pretrained version, we (both ‘Ours (S)’ and ‘Ours (L)’)) still achieve much better pose prediction accuracy than it.

OmniObject3D				
Method	R. error ↓	Acc.@15° ↑	Acc.@30° ↑	T. error ↓
RelPose++ (w/o bg, pretrained)	69.22	0.070	0.273	0.712
RelPose++ (w/o bg, Objaverse)	58.67	0.304	0.482	0.556
Ours (S)	15.06	0.695	0.910	0.162
Ours (L)	7.25	0.958	0.976	0.075
GSO				
Method	R. error ↓	Acc.@15° ↑	Acc.@30° ↑	T. error ↓
RelPose++ (w/o bg, pretrained)	107.49	0.037	0.098	1.143
RelPose++ (w/o bg, Objaverse)	45.58	0.600	0.686	0.407
Ours (S)	13.08	0.848	0.916	0.135
Ours (L)	2.46	0.976	0.985	0.026
ABO				
Method	R. error ↓	Acc.@15° ↑	Acc.@30° ↑	T. error ↓
RelPose++ (w/o bg, pretrained)	102.30	0.060	0.144	1.103
RelPose++ (w/o bg, Objaverse)	45.39	0.693	0.708	0.395
Ours (S)	26.31	0.785	0.822	0.249
Ours (L)	13.99	0.883	0.892	0.131